

Specifications

Dynamic Response:

Response time for stable weight:
 0 - 1,000d, 1,000 ms, maximum mean average
 1,000d +, 1,500 ms, maximum mean average

Internal Resolution:

500,000 internal count minimum

Overload Protection:

Corner & center overload protection

Power:

In-line power supply (included)
 Input: 100-240 VAC, +10% -15%, 3-wire w/ground
 Standard terminated with USA 3-prong plug
 Output: 12 V at .1 Amps DC minimum
 Frequency: 50/60 Hz +/-3 Hz, standard
 Power supply approvals: UL, CE, EN, CUL
 Battery type: Four AA alkaline batteries, 6 V, with
 low battery indication at 4.3 volts (not included)
 Battery life:
 50-250 hrs depending on backlight
 and auto-shutdown settings

USB HID:

USB 2.0 full speed; Vendor ID: 1C19;
 Product ID: 0002

Divisions (multi-range):

Kg triple range
 0-5 kg x 0.001 kg
 0-10 kg x 0.002 kg
 0-35 kg x 0.01 kg
 Lb/oz dual range
 0-7 lb x 0.05 oz
 0-70 lb x 0.2 oz

Divisions (multi-interval) :

Kg triple interval
 0-5 kg x 0.001 kg
 5-10 kg x 0.002 kg
 10-35 kg x 0.01 kg
 Lb/oz dual interval
 0-7 lb x 0.05 oz
 7-70 lb x 0.2 oz

Construction:

Die-cast aluminum load bridge and base housing
 with stainless steel weight platter

Display:

Minimum key press life of 500,000 cycles
 ABS plastic housing
 6 annunciators to indicate zero, gross/brutto, net,
 W1/W2/W3 multi-range
 3 buttons: units, on/off, F1 (Tare is not applicable)

RS-232 Cable (included):

10 ft DB 9-pin male to female, straight pass through

USB Cable (included):

46 in (1,168.4 mm) A/B type USB cable

Approvals:

NTEP COC # 17-002
 Canada Weights and Measures: AM - 6050
 CE Marked

Warranty:

Two-year limited warranty



Standard Features

- Simple operation, easy to set up
- Large six-digit backlight LCD display with 1 in (29 mm) characters protected by heavy duty tempered glass
- Powered USB HID point of sale interface – kg model only
- Nine-pin RS-232 interface for use with SMA and NCI protocols
- Four AA alkaline battery operation for portability
- Gravitational compensation allows for adjustment of factory calibration to meet your local gravity setting, non-approved

APPROVALS



BenchPro™ BP-P

Postal Bench Scale

Part Number/Price



Part #	Platform Capacity	Dimensions	Est. Weight	Price
187832	35 kg triple range	12 x 14 in	18 lb	Consult
195741	35 kg triple interval	12 x 14 in	18 lb	Consult
192361	70 lb dual range	12 x 14 in	18 lb	Consult
195742	70 lb dual interval	12 x 14 in	18 lb	Consult

Options/Accessories


Part #	Description	Est. Weight	Price
174783	Column bracket and post (12 x 14 scale only)	2 lb	Consult
180901	Second customer display, BenchPro BP-P no keyboard with 68 in cable	4 lb	Consult
174784	Second remote operator display, BenchPro BP-P with 68 in cable	4 lb	Consult
183103	16 in (H) tabletop display post for use with second display, customer or remote operator	4 lb	Consult
178501	USB-RS-232 serial adapter 3.28 ft cable	1 lb	Consult

Dimensions - Inches

	A	B	C	D
12 x 14	12	14	14.5	2.70

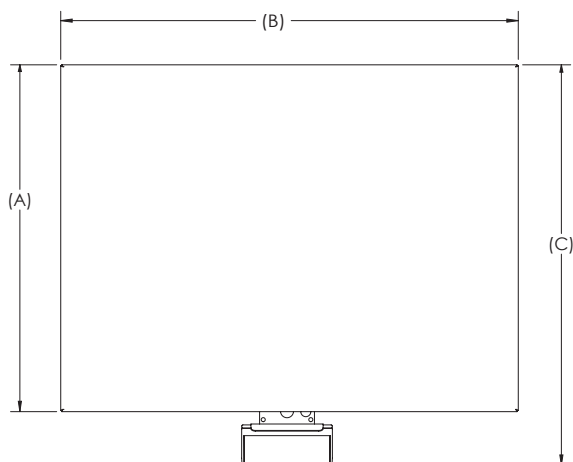

BP-P shown with 183103 and 180901

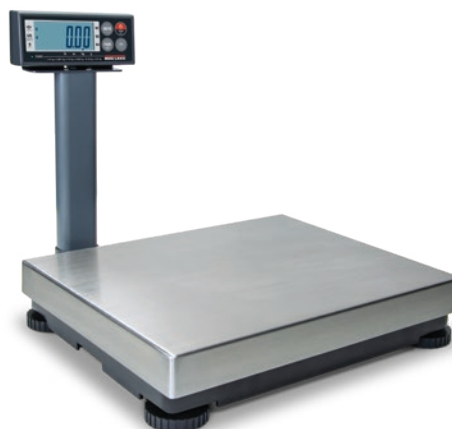

Shown with 174783